




**44 LB. STAINLESS STEEL FLAT TOP SCALE
#435**

PART #	DESCRIPTION
1	PLASTIC FACE PLATE

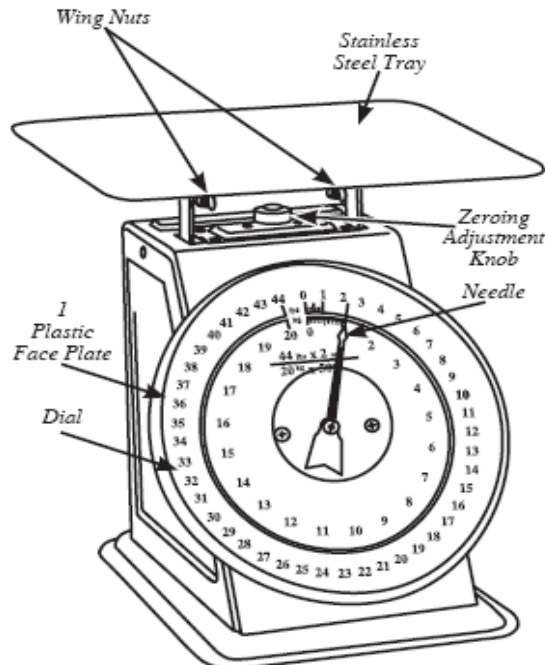

ASSEMBLY

Before using your Flat Top Scale for the first time, you must attach the tray onto the top of the scale.

Your scale has been shipped with a cardboard support in place to protect against damage during shipping.

1. Begin by removing the cardboard support from the scale.
2. Attach the tray to the top of the scale using the supplied wing nuts.
3. DO NOT over-tighten the wing nuts; damage to the threads may occur.

HOW TO ZERO THE SCALE

After attaching the tray to the top of the scale, you may notice the needle on the dial is not in the ZERO position.

To ZERO the scale, simply turn the zeroing adjustment knob on the top of the scale either clockwise or counter-clockwise (depending on what direction the scale is off) until the needle is pointing on "0".

When ZEROING the Scale, make sure there is nothing on the tray - this will result in an inaccurate reading.

You should ALWAYS make sure the scale is on "0" before trying to weigh an object.

**1 YEAR WARRANTY COVERS PARTS AND LABOR ONLY
RETURN FREIGHT IS THE RESPONSIBILITY OF THE PURCHASER**

LEM Products

4440 Muhlhauser Rd, Ste 300, West Chester, OH 45011 • 877-536-7763 • www.lemproducts.com